



DRUM FILTER serie 60 with HDPE tank

HDPE - SPECIAL
WARM SEA WATER



☆ STAINLESS STEEL MESH ☆

DRUM FILTER Serie 60 with HDPE tank

Flow rate up to 16 l/s (76 m3/h) with 100µ.

It can be quickly installed in cramped places due to its low size and weight.

It is suitable for little closed circuits, laboratories, testing station... etc.

Its 60 cm diameter drum operate at 5 rpm.




HIGH QUALITY

Strong points :

- ✓ A rinsing system optimized so as to make water saving.
- ✓ A machine with a 316L stainless steel drum.
- ✓ A machine of simple design and robust construction.
- ✓ A maintenance free solution.

HD PE
HIGH DENSITY
POLYETHYLEN
TANK


HIGH QUALITY

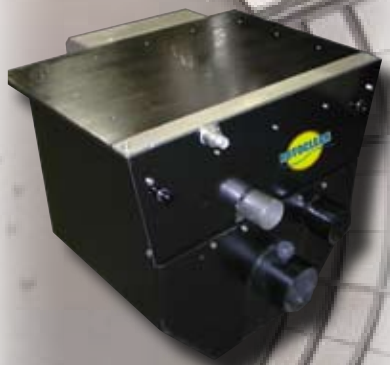

Drum driven by chain.

Table giving water volumes handled (l/s)

model :	2-60	
	Filter plate mesh	
	20μ	8
Water with maxi 10 mg/l of waste Outlet fish farm	30μ	14
	40μ	15
	60μ	21
	80μ	21
	100μ	21
D R U M F I L T E R W I T H T A N K		
Water with maxi 25 mg/l of waste Recirculation	30μ	7
	40μ	10
	60μ	15
	80μ	21
<i>In case of waste over 25 mg/l , please consult us.</i>		
Motor power 3x400v (w)	250	
Rinsing at 3 bars 80μ (l/s)	0,18	
Filter surface (m2)	0,5	
Number of plates	2	

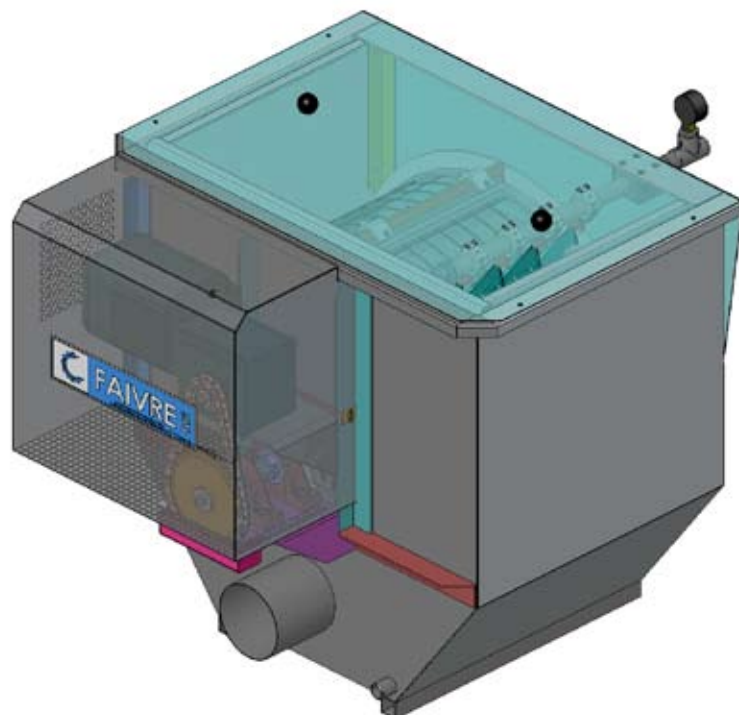

Pictures and technical data are not contractual. FAIVRE Sarl can bring any modification to its equipment at any time.