




# DRUM FILTER Serie 60 with frame



Maintenance free



## DRUM FILTER Serie 60 with frame

Flow rate up to 27 l/s (97 m<sup>3</sup>/h) with 100 $\mu$ .

It can be quickly installed in cramped places due to its low size and weight.

It is suitable for little closed circuits, laboratories, testing station...etc.

Made of Stainless steel AISI 304L or 316L.

### Strong points :


- ✓ A rinsing system optimized so as to make water saving.
- ✓ A machine entirely made of AISI 304L, AISI 316L stainless steel.
- ✓ A machine with a simple design and a robust construction.
- ✓ Free maintenance system.



☆ STAINLESS STEEL MESH ☆  
HIGH QUALITY




Maintenance free

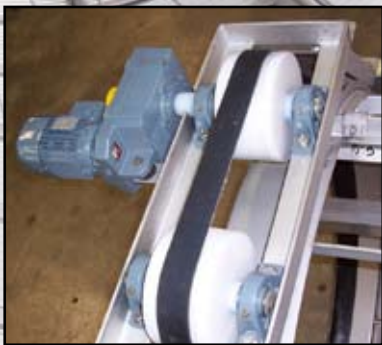

Drum driven by belt, simple and economical.

### Table giving water volumes handled (l/s) :

Filter model :	2-60	
	Filter plates mesh	
Water with maxi <b>10 mg/l</b> of waste <b>Outlet fish farm</b>	20μ	<b>8</b>
	30μ	<b>14</b>
	40μ	<b>15</b>
	60μ	<b>21</b>
	80μ	<b>22</b>
	100μ	<b>27</b>
Water with maxi <b>25 mg/l</b> of waste <b>Recirculation system.</b>	30μ	<b>7</b>
	40μ	<b>10</b>
	60μ	<b>15</b>
	80μ	<b>19</b>
<i>In case of waste over 25 mg/l, please consult us.</i>		
Motor power 3x400v (w)	250	
Rinsing (l/s) at 3 bars with 80μ	0,18	
Filter surface (m2)	0,50	
Number of plates	2	

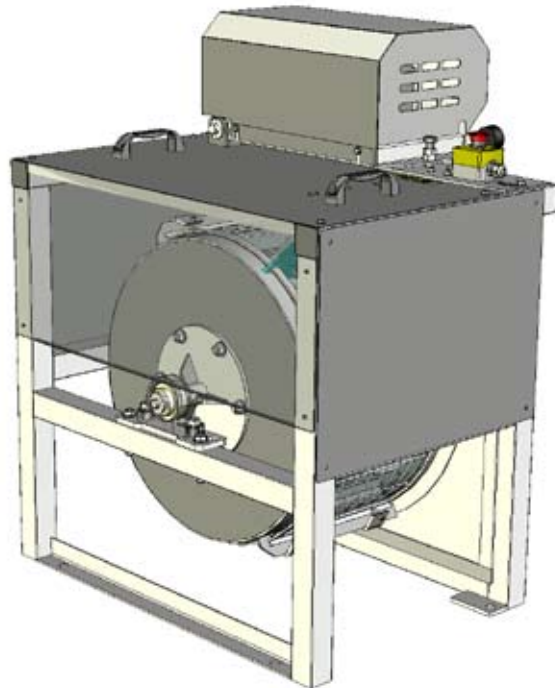

Pictures and technical data are not contractual. FAIVRE Sarl can bring any modification to its equipment at any time.